


max. 350 bar

Granater

Graner har funnits i många år och har bra dtagkraft och rensförmåga genom sina strålvinklar på 30 grader, G 101 har 14 o 23 grader.

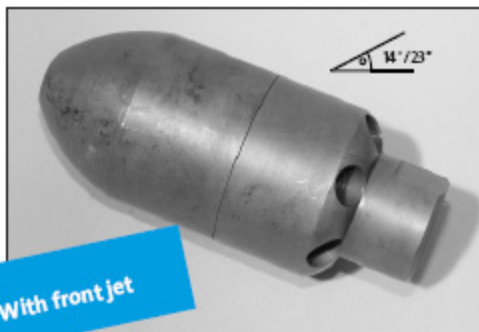

With front jet

| Order-No. | Designation | Weight Kg | Dimension mm LxBxH | Connection | Inserts | Scope of application from |
|-----------|-------------|-----------|--------------------|------------|--------------------|---------------------------|
| 0501 | G 50 | 2,3 | L x ϕ 110x70 | 1/2" | 6 x M6x1 ceramic | Ab / ₂ DN 100 |
| 0502 | G 75 | 3,0 | L x ϕ 140x70 | 3/4" | 6 x M 10x1 ceramic | Ab / ₂ DN 150 |
| 0503 | G 100 | 3,6 | L x ϕ 165x75 | 1" | 6 x M 10x1 ceramic | Ab / ₂ DN 200 |
| 0504 | G 101 | 5,0 | L x ϕ 175x80 | 1" | 8 x M 10x1 ceramic | Ab / ₂ DN 200 |

Granat Nozzle

Thanks to their outstanding pressure and cleaning performance Granat Nozzles can be used for all purposes. Especially for long reaches they show a high pressure performance. The angles of the nozzles are 30° respectively for the Granat Nozzle G 101 14°/23°. Ceramic inserts you will find on chapter IV. Adapters for reducing or increasing connection and Rotating Joints you will find at chapter VI.



Hemsida: www.vretmaskin.se, E-post: info@vretmaskin.se

Kapitel
chapter



2.4

